


300 S. DAYTON ST. DAVISON, MI 48423 PH: 810-653-9626 FAX:810-654-2616

## 1056-2727RC

DESCRIPTION:

## Coupling 27" CI/PL to 27"CI/PL

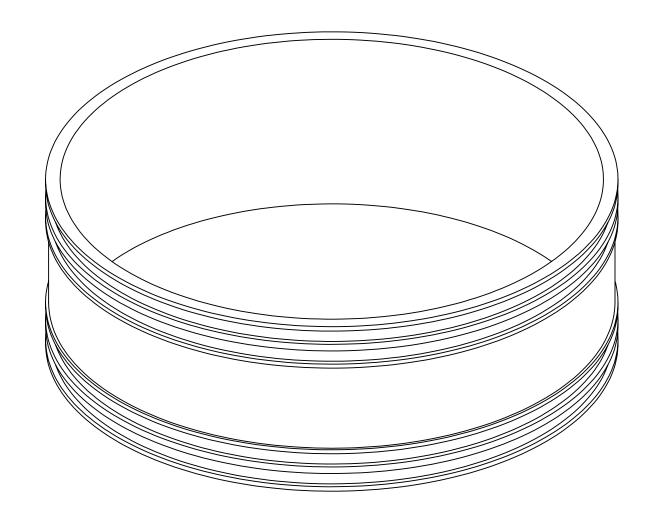

-HT Clamps (4) Locations 120 in lbs torque -Shield; .300SS 012 x 5.0 inch wide 300SS Clamps, 2 locations, 60 in lbs

Note

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FERNCO, INC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FERNCO, INC.

TOLERANCES:
Fractional ± 1/4"
.XX= ±.06
ANG.= ±3°
UNLESS OTHERWISE SPECIFIED

Part Weight		Installation Torque	120 in lbs	UNITS:	SIZE:
Min/Max Temp.	-30/140 Degrees F	Conforms to ASTM	D5926, C1173	INCHES	A
Pressure Tested		Clamps used	300 Series Stainless	3RD ANGLE P	ROJECTION
Material	Flexible PVC 60 Duro Shore A	Box Quantity		DO NOT SCAL	E DRAWING

1	DESIGNER:	scale: not to scale	
ON VG	CHECKER:	DATE: 1/7/2016	SHEET 1 OF 1