

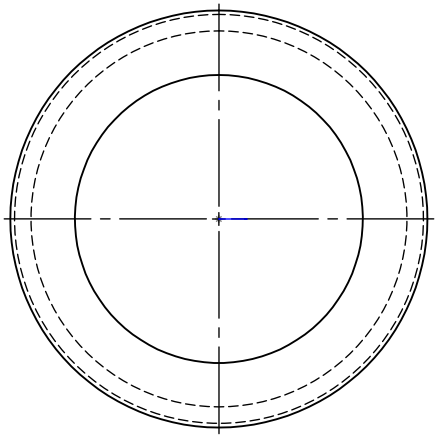


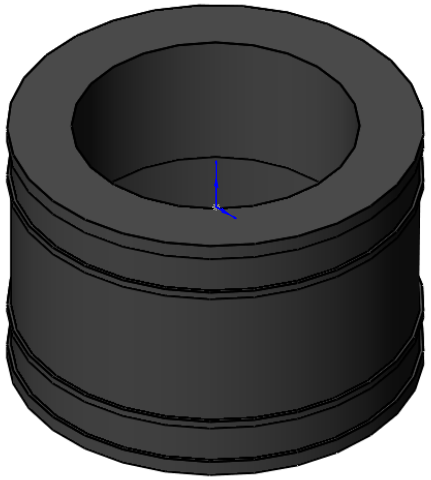

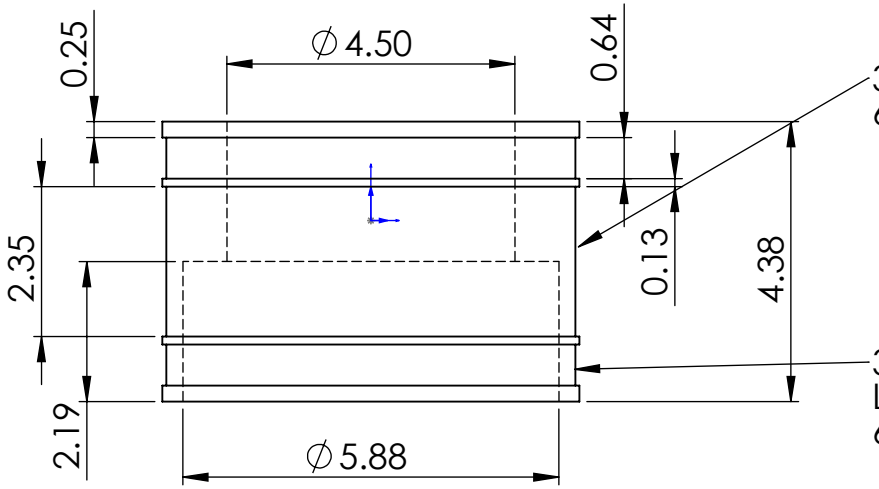

300SS Shield with 300SS Clamps 2pcs.
60 in-lb Installation Torque

316SS Nut & Bolt Clamps 2 Locations
60 in-lb Installation Torque

The Information Contained in this Drawing is the Sole Property of Fernco. Any Reproduction in Part or in Whole without Written Permission is Prohibited.

Gasket Material - Black Flexible PVC, 60 Shore A
Clamps - Nut &Bolt,316SS Components, Inst. Torque 60 in-lb
Complies with - ASTM D5926, C1173
Min/Max Temp - (-)30 to 140°F
Drain, waste and Vent Only - No Pressure

Fernco

Tolerance:
Angular ± 3°
.X = ± 0.09
.XX = ± 0.06

Dimensions are in Inches

Do Not Scale

SHEET 1 OF 1

Drawn by: T. Dipzinski

DATE: 1/13/2016

Part Number: 5006-44LCRC

Description: 4" Large Con to 4" PL