
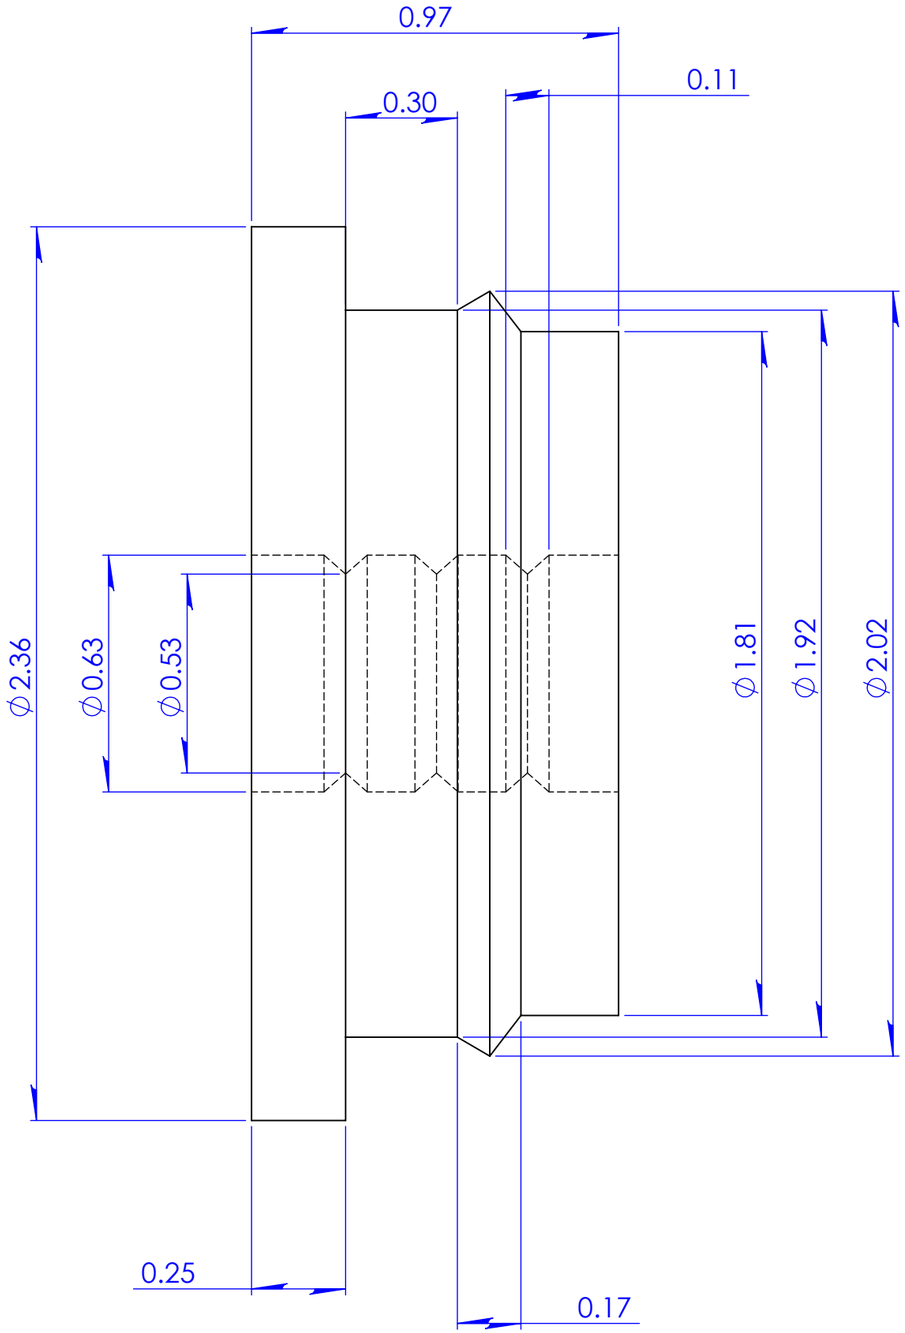


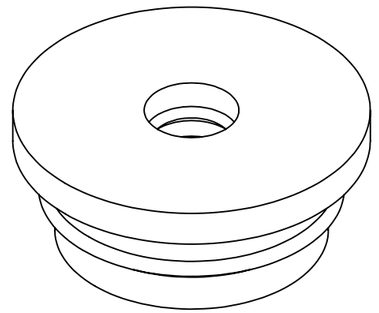

Part Weight	0.15 lbs.
Min/Max Temp.	-30/140 Degrees F
Pressure Tested	4.3 PSI
Material	Flexible PVC 60 Duro Shore A
Installation Torque	
Conforms to ASTM	D5926
Box Quantity	
Clamps used	

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

Fernco inc.

300 S. DAYTON ST.
DAVISON, MI 48423
PH: 810-653-9626
FAX:810-654-2616

TOLERANCES:
.X= Fractional ±
.XX= ±.060
.XXX= ±.032
ANG.= ±0.5°
UNLESS OTHERWISE SPECIFIED

DESCRIPTION:
Utility Connector

UC-1550

UNITS: INCHES
SIZE: A
DESIGNER: D. Brady
SCALE: not to scale
3RD ANGLE PROJECTION
DO NOT SCALE DRAWING
CHECKER:
DATE: 3/1/2011
SHEET 1 OF 1