Strong-Seal® SYSTEMS



STRONG-SEAL® MS-2®A


STOPS INFLOW AND RESTORES INTEGRITY

WIDE APPLICATION RANGE
Suitable for vertical, horizontal, and overhead repairs in manholes, pipelines, tanks, and tunnels, making MS-2®A versatile across various municipal and industrial applications.

INFILTRATION PREVENTION
Effectively stops inflow and infiltration, providing a robust liner to prevent leaks and groundwater intrusion in sewer infrastructure, especially manholes.

HIGH COMPRESSIVE STRENGTH
Achieves over 7,000 PSI in 28 days, providing excellent structural support and long-lasting performance for rehabilitated concrete and masonry structures.

ZERO SHRINKAGE
Maintains dimensional stability with no shrinkage (ASTM C596) at 28 days, ensuring long-lasting integrity of the repair.

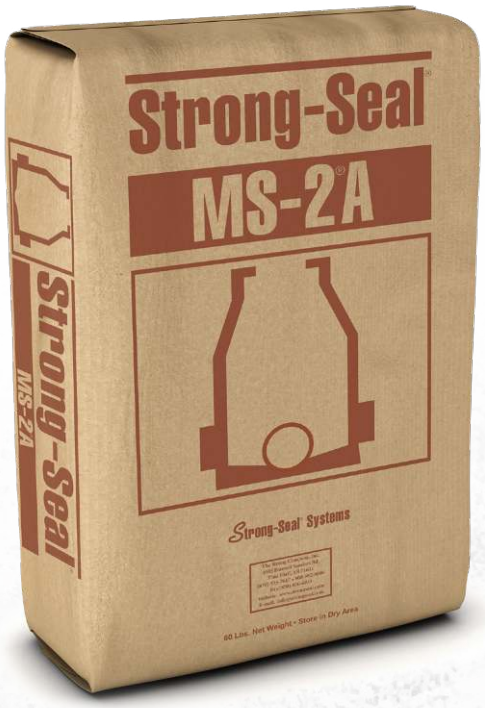

Part Number	Description
STRS-MS-2A	Strong-Seal MS-2®A Economical Cementitious Mortar	60 lb. Bag

Fernco Inc.
INFRASTRUCTURE

UNITED STATES
(877) 450-3701
www.fernco.com

CANADA
(519) 332-6711
www.fernco.ca

PRODUCT DESCRIPTION

MS-2®A provides a system for the rehabilitation of concrete or masonry structures to stop inflow, infiltration, exfiltration, and restore structural integrity where there is no evidence of hydrogen sulfide (biogenic) corrosion. MS-2®A is a Type I/II portland cement based product blended with pozzolans, masonry sand, alkaline-resistant fiberglass reinforcement, and performance enhancing admixtures used to form a structural monolithic liner covering all interior substrate surfaces. MS-2®A is specifically formulated for applications with a pH of 3.0 or higher.

PERFORMANCE SPECIFICATIONS

Compressive Strength (ASTM C109)	Flexural Strength (ASTM C293)
>9,000 psi | 28 Days	>1,200 psi | 28 Days
Tensile Strength (ASTM C496)	**Freeze/Thaw Resistance (ASTM C666)**
>800 psi | 28 Days	Pass, No Damage | 300 Cycles
Bond Strength (ASTM C882)	**Drying Shrinkage (ASTM C596)**
>2,000 psi | 28 Days	0% | 28 Days @ 90% RH
Wet Unit Weight (ASTM C138)	**Packaging**
134 ± 5 lb/ft^3	60 lb bag / 40 bags per pallet

Yield per Bucket
0.55 ft^3 / 13.0 ft^2 @ ½" thick

TYPICAL STRUCTURES

MS-2®C provides vertical, horizontal, and overhead repairs to a variety of concrete and masonry structures including:

- Manholes
- Tanks & Containment
- Tunnels & Pipelines
- Wastewater Facilities

EQUIPMENT

Approved application equipment includes the SprayMate® 35C, SprayMate® 35D, and MiniMate II. If using other equipment, please contact The Strong Company, Inc.

SURFACE PREPARATION

Remove all foreign material and laitance from the substrate using a high pressure water spray (minimum 3000 psi). Remove loose and protruding brick, mortar, and concrete using a mason's hammer, chisel and/or scraper. Fill any large voids with a rapid-setting patching product.

Stop active leaks using an instant-setting, specially formulated product per manufacturer's recommendations. Some leaks may require weep holes to localize the infiltration during the application. After application, the weep holes shall be plugged with the instant-setting product prior to final pass.

When severe infiltration exists, pressure grouting may be required. Follow manufacturer's recommendations when pressure grouting. Make any bench, invert, floor, or service line repairs at this time using a rapid-setting patching product per manufacturer's recommendations.

MIXING

Use 1.2 to 1.5 gallons of water per bag of product. Add the required amount of water to the mixer first, followed by product. Mix until consistency allows for application of up to one inch thick without material "sagging" on a vertical surface. Use the minimum amount of water to achieve desired consistency. Follow all other manufacturer's recommendations.

Discharge mixed material into hopper and prepare another batch in such a manner as to allow continuous application without interruption until complete.

APPLICATION

Confirm substrate is clean and free of all foreign material and is damp without noticeable free water droplets or running water prior to application. Apply material up to one (1) inch thick in one or more passes starting from the bottom; however, minimum total thickness shall not be less than ½ inch.

Trowel the surface to a relatively smooth finish being careful not to over trowel. Apply a wet brush finish to the troweled surface. Follow manufacturer's recommendations when more than 24 hours have elapsed between applications.

After vertical and overhead application, apply material to bench or floor so that a gradual slope is produced from the walls to the invert or center of the floor. Provide a ½ inch minimum thickness at the invert or center of the floor. Round the wall/bench/floor intersection to a uniform radius the full length of the intersection. Trowel and brush finish as detailed above.

CURING

Take care to minimize exposure of applied material to sunlight and air movement. Cover the structure if application of additional passes is to be longer than 15 minutes. Do not expose to sunlight or air movement for longer than 15 minutes before covering or closing access. Shade the structure in hot and arid climates during application. Keep the applied material damp for the first 72 hours if the humidity level is below 70%. An ASTM C309 curing compound may be used in lieu of keeping material damp.

Hold times for the final application are as follows: storm run-off and surcharge – 4-6 hours; force main impact – 6-8 hours

WEATHER

Do not apply if ambient temperature is below 40°F. Do not apply to frozen surfaces or if substrate is expected to freeze within 24 hours after application. Keep the material temperature at time of application below 90°F. Do not allow water temperature to exceed 80°F. Chill with ice if necessary.

ACCEPTANCE

Cast four 2 inch cube specimens each day or for every pallet of material used, whichever occurs first. Properly package, label, and return specimens to the manufacturer for testing in accordance with the owner's or manufacturer's directions for compressive strength per ASTM C109.